

Target model U2B



A target from Kongsberg Mikroelektronikk AS, mainly designed for use at 300m ranges.

The target frame is made of solid wood.

3 sensors are mounted at the bottom of the target, with the inspection opening in front.

The lowest 20 cm of the acoustic measuring chamber, has to be covered in front in order to secure the sensors.

The target has an adjustable horizontal rubber band to seal the acoustic chamber.

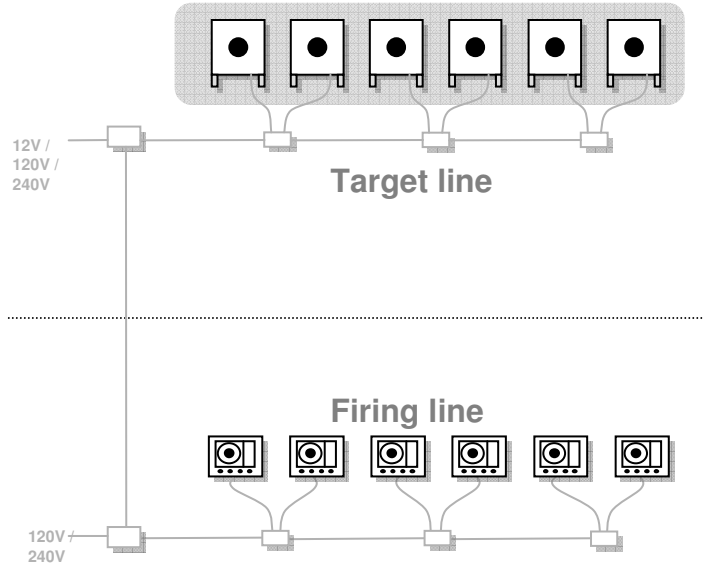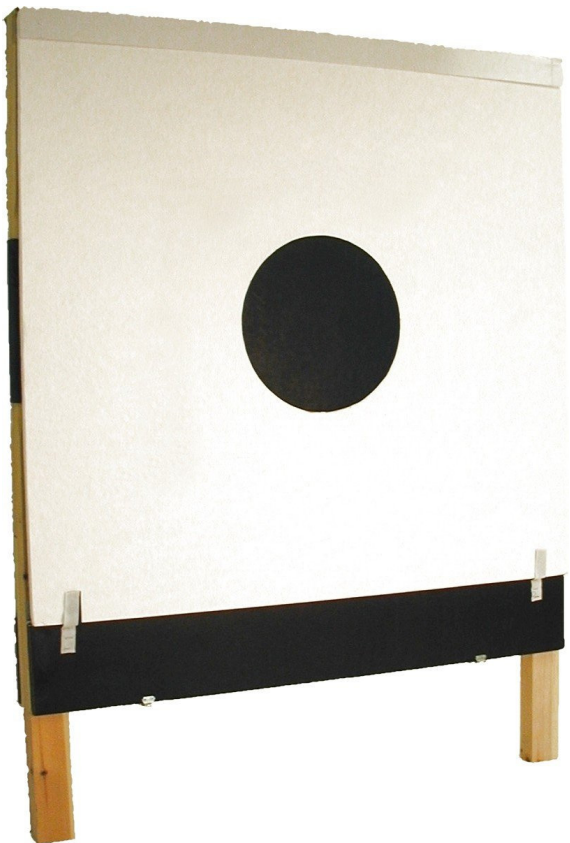


Recommended use :

- 100m – 200m - **300m** - 500m

Technical :

Dimensions:

- A 1500 mm
- B 1500 mm
- C 400 mm
- D 200 mm
- E 70 mm
- F 47 mm
- G 120 mm



Temperature range -30 til + 60 °C

Horizontal rubber band 4 x 570 mm

Weight..... Approx. 43 kg

Supplementary equipment :

- Specific aiming images.